



ENGEL

portable fridge-freezers

A LEGEND IN RELIABILITY



ST90F
Freestanding

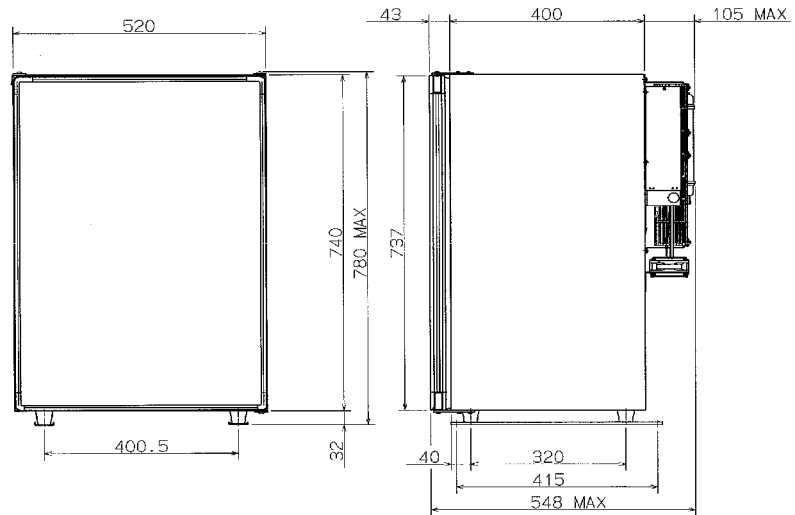

TECHNICAL SPECIFICATION SHEET

FEATURES:


100% CFC Free
Thermostat Controlled
Energy Efficient Sawafuji Swing Motor
Low DC Current Draw: 12V 2.5 Amps
Automatic Voltage Selection AC / DC

Freestanding Cabinet Design
Generator & Solar Panel Compatible
Strong Construction
Compact & Lightweight
Noise Level: 32dB

Polyurethane Insulation
Turbo Fan
3 Year Manufacturers Warranty
Reversible Door - LH / RH

SPECIFICATIONS:

Storage Volume:	Litres	80 Litres
Overall Dimensions:	H x W x D	780mm x 520mm x 548mm
Installation Dimensions:	D	505mm
Materials:		
Cabinet:		
Outer Enclosure:	Coated Steel Sheet	
Inner Case:	High Impact Polystyrene	
Insulation:	Polyurethane Foam	
Door:		
Door Panel:	Steel Plate	
Door Frame:	Polypropylene & Polyvinyl Chloride	
Door Liner:	High Impact Polystyrene	
Insulation:	Polyurethane Foam	
Attachments:		
		Ice Cube Tray x 2
		Shelf x 2
		Drainage Pan x 1
		Door Pocket x 2
Input Voltage:	AC	AC 185 ~ 264V, 50/60Hz
	DC	DC 10.5 ~ 32V
Rated Amperage:	AC	AC 0.35A
	DC	DC 12V 2.5A, 24V 1.3A
Compressor Rating:	AC 13 ~ 16V, 50Hz, 33W	
Refrigerant:	Tetrafluoroethane (R-134a)	
Weight:	28kg	

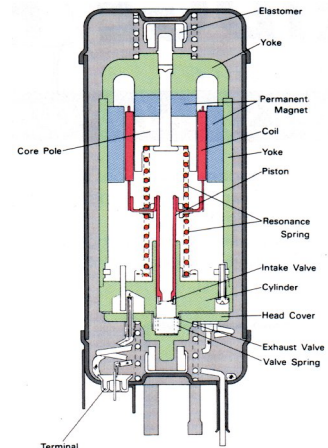

Sawafuji Swing Motor